



SOLID TO SUCCEED

XCMG European Sales and Services GmbH

Add: Europark Fichtenhain B4, 47807 Krefeld, Germany

E-mail: info@xcmg-ess.de



WWW.XCMGGLOBAL.COM
XCMG OFFICIAL WEBSITE

XCMG

XT4018KH
TELEHANDLERS

MAX. LIFTING HEIGHT 17.55m

MAX. LIFTING CAPACITY 4000kg

RATED POWER
DIESEL ENGINE 74kW@2200r/min

XCMG
SOLID TO SUCCEED

XT4018KH

TELEHANDLERS

PRODUCT PARAMETER

ITEM	PARAMETER
Dimension	Metric
Overalllength (without fork)	6270 mm
Overallwidth (stabilizers stowed)	2320 mm
Overallheight	2480 mm
Wheelbase	3050 mm
Wheedistance	1920 mm
Min. ground clearance	370 mm
Fork dimension	1200×122×50 mm
Weight and tires	
Totaweight (with fork)	12000kg
Tire specification	400/80-R24
Performance	
Max. lifting capacity	4000 kg
Load center to carriage	600 mm
Max. lifting height	17.55 m
Lift capacity at maximum height	2500 kg
Max. outreach	13.1 m
Lift capacity at maximum reach	850 kg
Boom up	≤16 s
Boom down	≤18 s
Boom extend	≤18 s
Boom retract	≤15 s
Fork tilt down	≤4 s
Fork tilt up	≤4 s
Boom luffing range	-3° ~ 72°
Carriage tilt range	-12° ~ 114°
Max. traveling speed	≥33 km/h
Max. traction force	≥60kN
Min. turning radius	≤3920 mm
Frame leveling angle	±10°
Power System	
Power source	Diesel engine
Engine brand/model	Deutz TCD 3.6
Number of cylinders	4
Rated power/rpm	74kW/2200 r/min
Emission standard	EU V
Max. torque/rpm	420N.m
Fuel tank volume	140L
Transmission System	
Numbers of gears (forward/backward)	2/2
Transmission type	Hydrostatic drive
Steering mode	4-wheel steering
Drive mode	4×4
Hydraulic System	
Hydraulic pump type	Piston pump
Hydraulic system pressure	28Mpa
Hydraulic system flow	150L/min
Hydraulic oitank volume	140L

STANDARD CONFIGURATION

Cabin
Heating and cooling air conditioning
Air-suspended fabric seats
Anti-tip system
Double turn warning light
Astern image
Front and rear wipers
Electric heating glass in rear window

Frame
Wet brake system
Suspension damping system
Multi-mode steering function
Leg position detection function
Rear axle midposition detection function
Easy lubrication

Arm bracket
Boom synchronous telescopic function
Length Angle real-time feedback system
Fork leveling automatically
Boom brush
Manual quick change


OPTIONAL CONFIGURATION

Electric fan
Phone stand
Leather seat
Seat ventilation and heating
Top wiper
Electric combination rearview mirror
The anterior genus has a mirror
Side window electrically heated glass
Fall rack
Stop wedge
The lifting arm has a harness
It has oil port expansion
Foam filled tire
Vertical lift function

OPTIONAL ATTACHMENTS


Forks
Bucket
Hooks

DIMENSION

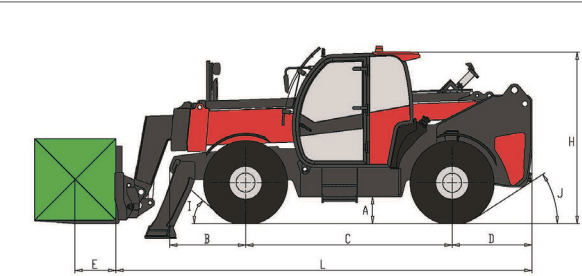


A	Min. ground clearance	370mm
B	Front overhang	2010mm
C	Wheebase	3050mm
D	Rear overhang	1210mm
E	Load center to carriage	600mm
L	Overalllength	6270mm
H	Overallheight	2480mm
M	Overallwidth	2320mm
I	Approach angle	40°
J	Departure angle	33°

LOAD CHART

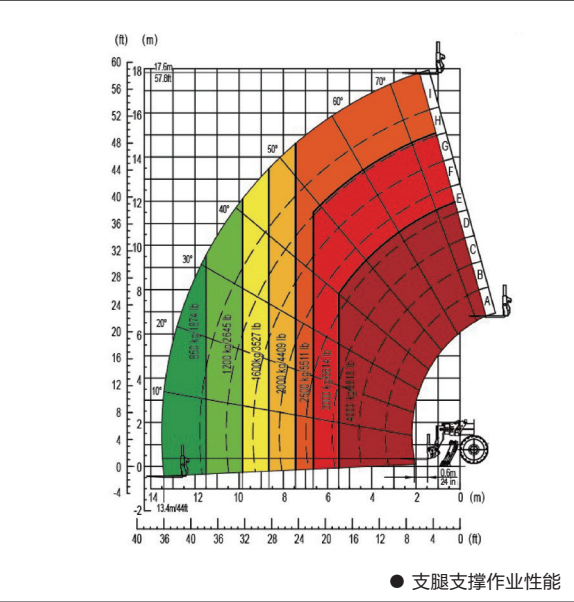

● 支腿支撑作业性能

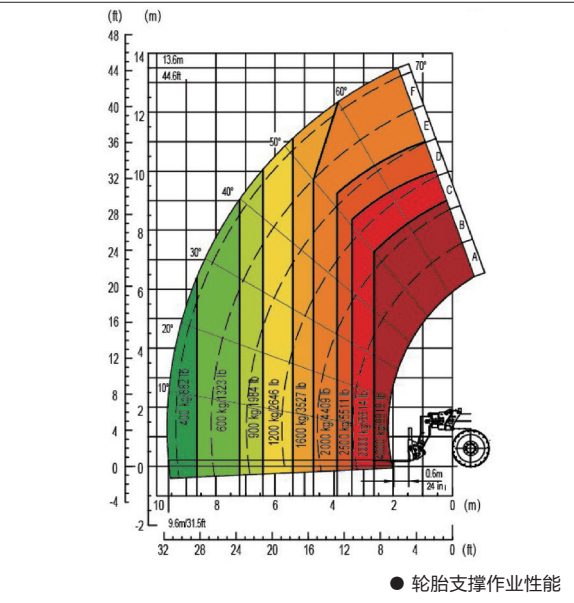

● 轮胎支撑作业性能